

【取り寄せ品】 商品名

銅板 C1100P-1/4H

JIS規格銅及び銅合金板


JIS-H 3100

サイズ					
1.5	×	600	×	600	
1.5	×	900	×	900	
0.8	×	1000	×	2000	
1.0	×	1000	×	2000	
1.2	×	1000	×	2000	
1.5	×	1000	×	2000	
1.6	×	1000	×	2000	
2.0	×	1000	×	2000	
2.3	×	1000	×	2000	
2.5	×	1000	×	2000	
3.0	×	1000	×	2000	
3.2	×	1000	×	2000	
4.0	×	1000	×	2000	
5.0	×	1000	×	2000	
6.0	×	1000	×	2000	
8.0	×	1000	×	2000	
10.0	×	1000	×	2000	
12.0	×	1000	×	2000	
15.0	×	1000	×	2000	
20.0	×	1000	×	2000	
25.0	×	1000	×	2000	

機械的性質

JIS-H 3100

合金 一質別	引張試験			曲げ試験			硬さ試験	
	厚さ mm	引張強さ N/mm ²	伸び %	厚さ mm	曲げ 角度	内側 半径	厚さ mm	ビッカース 硬さ(7)HV
C1100P -1/4H	0.15以上 0.5未満	215~285	20以上	2以下	180°	厚さの 0.5倍	0.3以上	55~100 (8) (9)
	0.5以上 30以下	215~275	25以上					

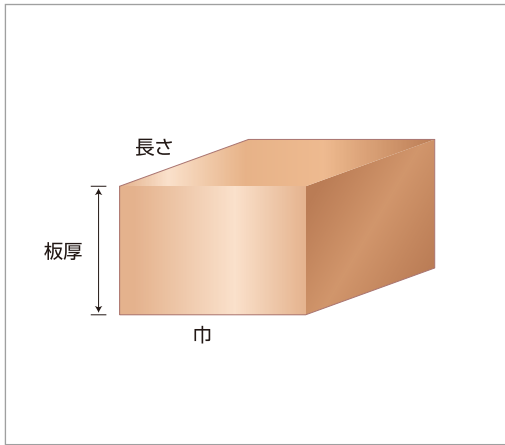

【取り寄せ品】 商品名

銅小板 C1100P-1/4H

JIS規格銅及び銅合金板

JIS-H 3100

○印に関しては下記材質もごさいます

サイズ	C1220P-1/4H	C1020P-1/2H	1ケース
0.1 × 365 × 1200	○		50
0.15 × 365 × 1200			50
0.2 × 365 × 1200	○	○	40
0.25 × 365 × 1200	○		30
0.3 × 365 × 1200	○	○	30
0.35 × 365 × 1200	○		30
0.4 × 365 × 1200	○	○	20
0.5 × 365 × 1200	○	○	20
0.6 × 365 × 1200	○	○	15
0.7 × 365 × 1200	○	○	15
0.8 × 365 × 1200	○	○	10
1.0 × 365 × 1200	○	○	10
1.2 × 365 × 1200	○	○	10
1.4 × 365 × 1200			8
1.5 × 365 × 1200	○	○	8
1.6 × 365 × 1200	○	○	8
1.8 × 365 × 1200			7
2.0 × 365 × 1200	○	○	5
2.3 × 365 × 1200			5
2.5 × 365 × 1200		○	5
2.6 × 365 × 1200			5
3.0 × 365 × 1200	○	○	4
3.2 × 365 × 1200		○	4
3.5 × 365 × 1200			3
4.0 × 365 × 1200	○	○	3
4.5 × 365 × 1200			3
5.0 × 365 × 1200		○	2

銅小板


C1100P-1/4H

JIS規格銅及び銅合金板

JIS-H3100

○印に関しては下記材質もごさいます

サイズ	C1220P-1/4H	C1020P-1/2H	1 ケース
6.0 × 365 × 1200		○	2
8.0 × 365 × 1200		○	1
10.0 × 365 × 1200		○	1
12.0 × 365 × 1200			1
15.0 × 365 × 1200			1
16.0 × 365 × 1200			1
20.0 × 365 × 1200			1
25.0 × 365 × 1200			1
30.0 × 365 × 1200			1
35.0 × 365 × 1200			1
40.0 × 365 × 1200			1

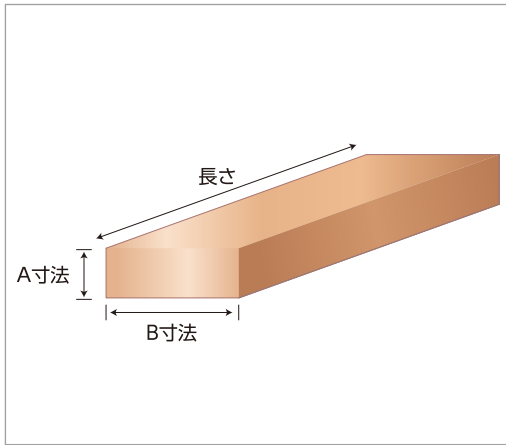

【取り寄せ品】 商品名

銅ブスバー C1100BB-1/2H

JIS規格銅ブスバー

JIS-H 3140

A寸法	B寸法	長さ
2.0	10	5000
2.0	12	5000
2.0	15	5000
2.0	20	5000
3.0	10	5000
3.0	12	5000
3.0	15	5000
3.0	16	5000
3.0	18	5000
3.0	20	5000
3.0	25	5000
3.0	30	5000
3.0	32	5000
3.0	35	5000
3.0	40	5000
3.0	50	5000
3.0	75	5000
4.0	12	5000
4.0	15	5000
4.0	18	5000
4.0	20	5000
4.0	25	5000
4.0	30	5000
4.0	35	5000
4.0	40	5000
4.0	50	5000
4.0	60	5000

A寸法	B寸法	長さ
4.0	15	5000
5.0	20	5000
5.0	22	5000
5.0	25	5000
5.0	30	5000
5.0	32	5000
5.0	35	5000
5.0	40	5000
5.0	50	5000
5.0	60	5000
5.0	75	5000
5.0	100	5000
5.0	125	5000
6.0	12	5000
6.0	15	5000
6.0	18	5000
6.0	20	5000
6.0	25	5000
6.0	30	5000
6.0	32	5000
6.0	35	5000
6.0	38	5000
6.0	40	5000
6.0	50	5000
6.0	60	5000
6.0	65	5000
6.0	75	5000

銅ブスバー C1100BB-1/2H

JIS規格銅ブスバー

JIS-H 3140

A寸法	B寸法	長さ
6.0	80	5000
6.0	100	5000
6.0	125	5000
6.0	150	5000
6.0	200	5000
8.0	15	5000
8.0	20	5000
8.0	25	5000
8.0	30	5000
8.0	35	5000
8.0	40	5000
8.0	50	5000
8.0	60	5000
8.0	65	5000
8.0	75	5000
8.0	80	5000
8.0	100	5000
8.0	125	5000
8.0	150	5000
8.0	200	5000
10.0	20	5000
10.0	25	5000
10.0	30	5000
10.0	35	5000
10.0	40	5000
10.0	50	5000
10.0	60	5000

A寸法	B寸法	長さ
10.0	75	5000
10.0	80	5000
10.0	100	5000
10.0	125	5000
10.0	150	5000
10.0	200	5000
12.0	20	5000
12.0	30	5000
12.0	40	5000
12.0	50	5000
12.0	60	5000
12.0	75	5000
12.0	100	5000
12.0	125	5000
12.0	150	5000
12.0	200	5000
15.0	20	5000
15.0	25	5000
15.0	30	5000
15.0	40	5000
15.0	50	5000
15.0	75	5000
15.0	100	5000
15.0	125	5000
15.0	150	5000
15.0	200	5000
15.0	250	5000

銅ブスバー C1100BB-1/2H

JIS規格銅ブスバー

JIS-H 3140


A寸法	B寸法	長さ
20.0	30	5000
20.0	40	5000
20.0	50	5000
20.0	75	5000
20.0	100	5000
20.0	125	5000
20.0	150	5000
20.0	200	5000

A寸法	B寸法	長さ
20.0	250	5000
25.0	30	5000
25.0	40	5000
25.0	50	5000
25.0	75	5000
25.0	80	5000
25.0	100	5000
30.0	100	5000

機械的性質 C1100BB-1/2H

JIS-H 3140

引張試験			曲げ試験		
厚さ mm	引張強さ N/mm ²	伸び %	厚さ mm	曲げ 角度	内側 半径
2以上 20以下	245~315	15以上	2以上 20以下	90°	厚さの 1.5倍

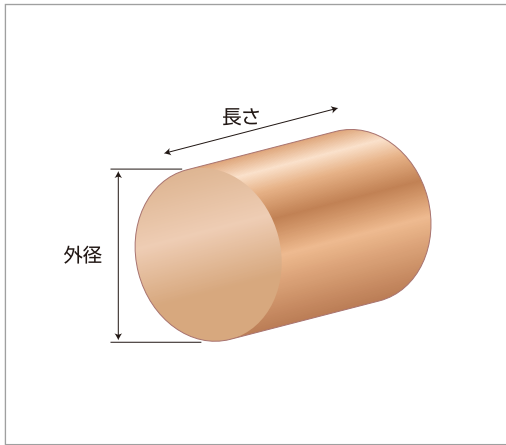

【取り寄せ品】 商品名

銅棒 C1100BD-H

JIS規格銅及び銅合金棒

JIS-H 3250

外 径	長 さ
3.0	2000
4.0	2000
5.0	2000
6.0	2000
7.0	2000
8.0	2000
9.0	2000
10.0	2000

外 径	長 さ
3.0	4000
4.0	4000
5.0	4000
6.0	4000
7.0	4000
8.0	4000
9.0	4000
10.0	4000
11.0	4000
12.0	4000
13.0	4000
14.0	4000
15.0	4000

外 径	長 さ
16.0	4000
17.0	4000
18.0	4000
19.0	4000
20.0	4000
21.0	4000
22.0	4000
23.0	4000
24.0	4000
25.0	4000
26.0	4000
28.0	4000
30.0	4000
32.0	4000
35.0	4000
36.0	4000
38.0	4000
40.0	4000
42.0	4000
45.0	4000
48.0	4000
50.0	4000
55.0	4000
60.0	4000

銅棒 C1100BD-H

JIS規格銅及び銅合金棒

JIS-H 3250


外 径	長 さ
65.0	4000
70.0	4000
75.0	4000
80.0	4000

外 径	長 さ
85.0	4000
90.0	4000
95.0	4000
100.0	4000

機械的性質

JIS-H 3250

合金 一質別	径、辺、対辺距離 mm	引張試験		硬さ試験	
		引張強さ N/mm ²	伸び %	ビッカース 硬さ(6)HV	ブリネル硬さ HBW10/3000
C1100BD-H	6以上 25以下	275以上	—	—	—
	25を超え 50以下	245以上	—	—	—

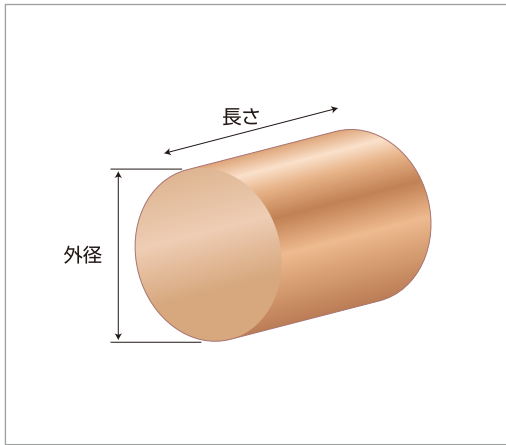

【取り寄せ品】 商品名

銅棒 C1100BD-F

JIS規格銅及び銅合金棒

JIS-H 3250

外 径	長 さ
105.0	4000
110.0	4000
120.0	4000
130.0	4000
150.0	要問合せ
180.0	要問合せ

機械的性質

JIS-H 3250

合金 一質別	径、辺、対辺距離 mm	引張試験		硬さ試験	
		引張強さ N/mm ²	伸び %	ビッカース 硬さ(6)HV	ブリネル硬さ HBW10/3000
C1100BD-F	-	-	-	-	-